




Palm Zire 31 Screen Replacement

This guide will teach you how to replace your broken screen.

Written By: Gabe

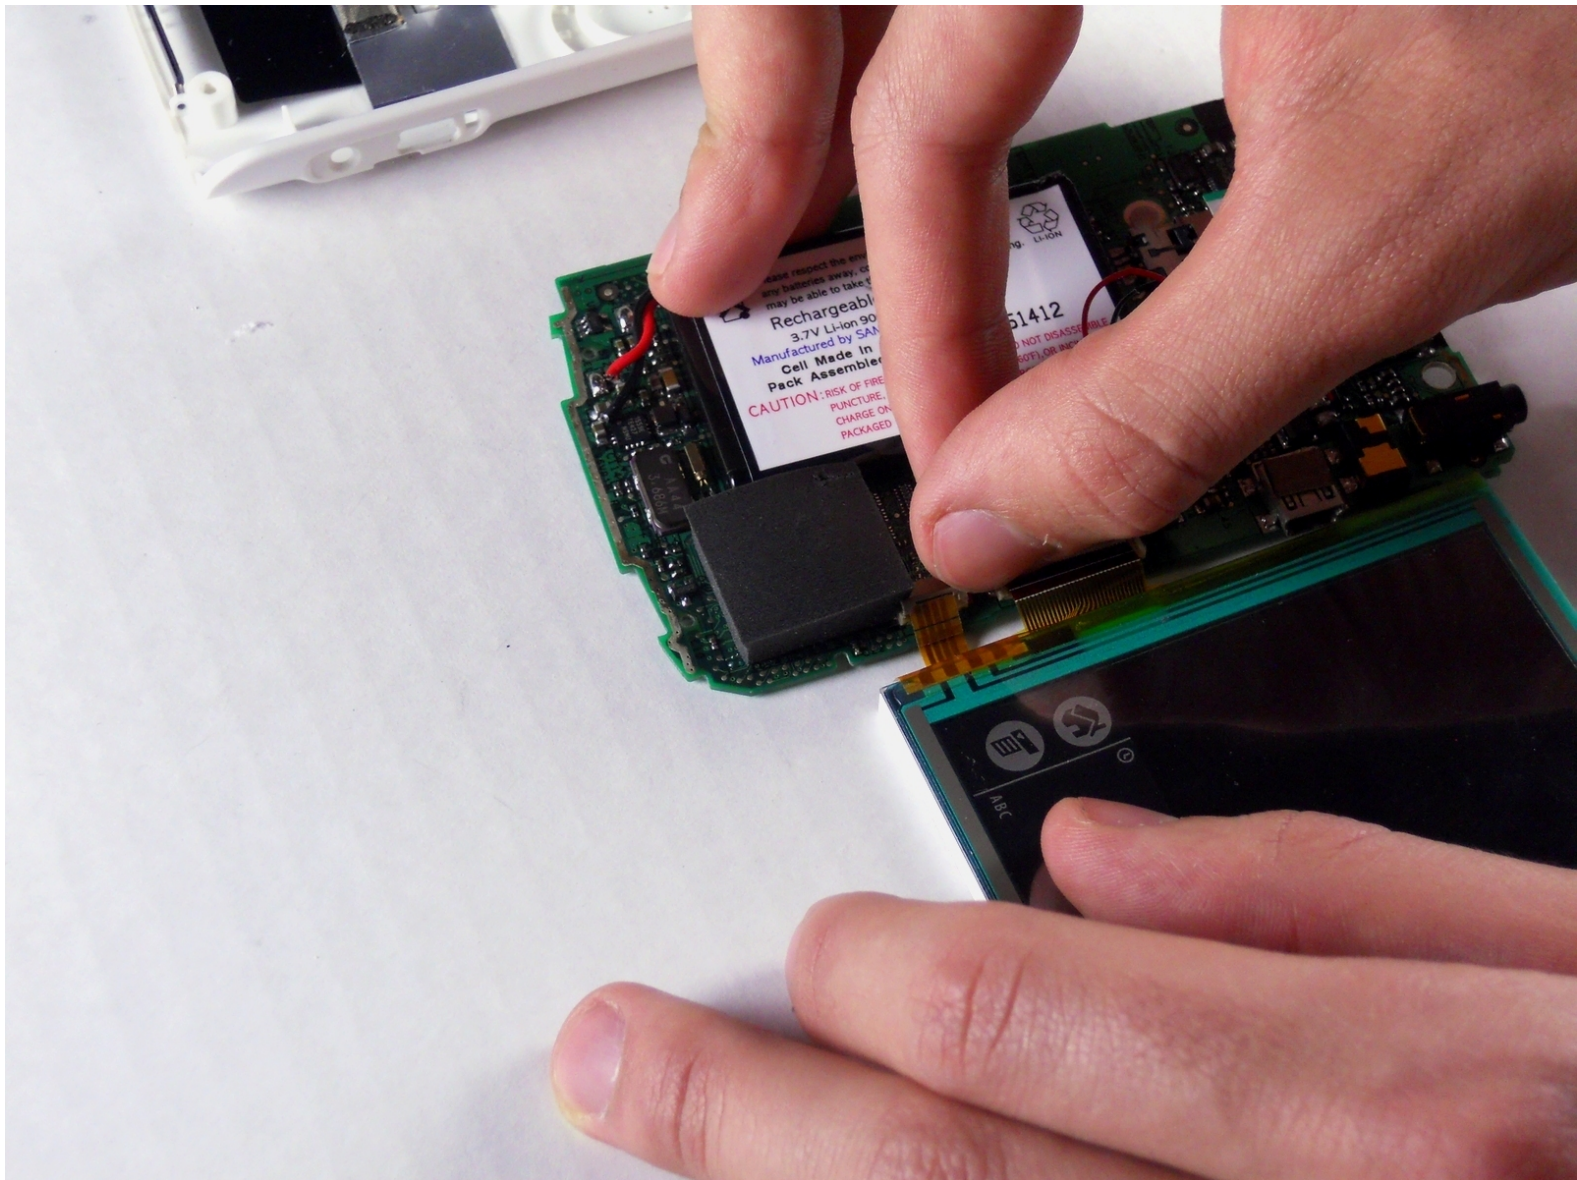

INTRODUCTION

If you know that your screen needs to be replaced, this guide will show you how to do so.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Case




- Unscrew the two 7.35mm Torx T6 screws.

Step 2




- Using the flat end of the spudger, carefully pry the black cover on the top from the blue front cover.

Step 3

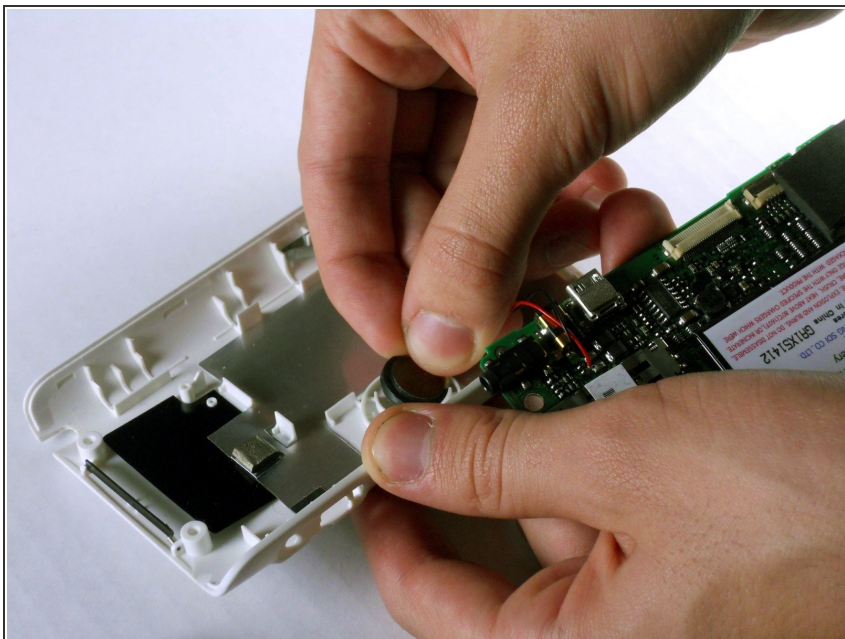


- Carefully remove the speaker from the back white cover by just pulling it gently. It is glued on.

Step 4

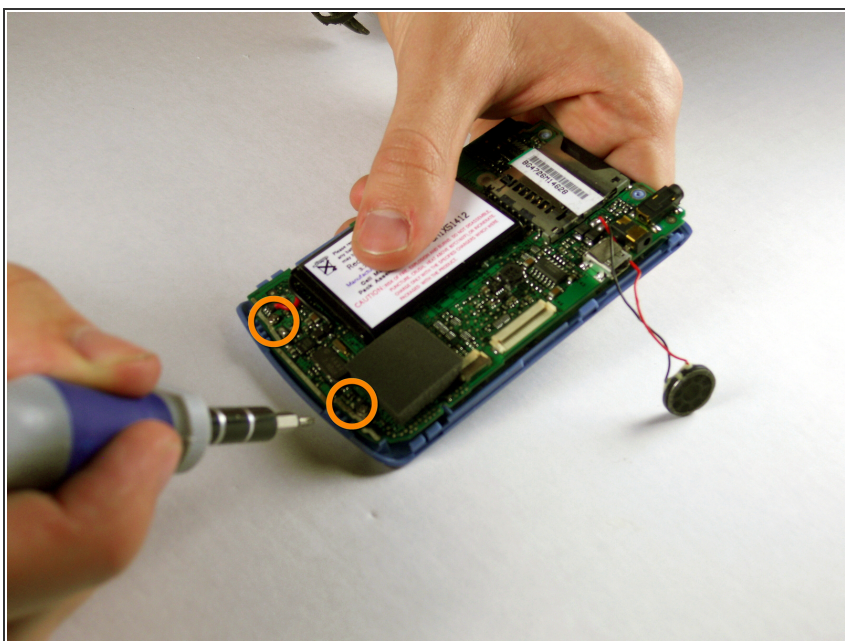

- Unscrew the #00 5.75mm Phillips screws from the bottom of the motherboard. The front blue panel should fall right off.

Step 5 — Screen

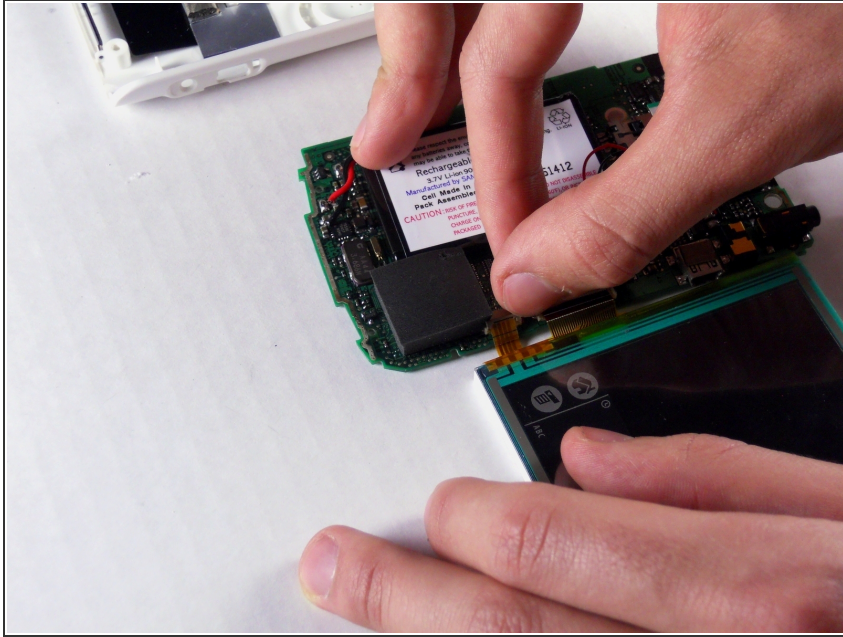

- Carefully pull back the brown cable holders and separate the screen from the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 02:47:17 PM.